


- ① 40mm thick NBK terracotta tile
- ② CLP40 - NBK extruded clip
- ③ VTS30/VTS31 Alum. extruded carrier track
- ④ SGA - Alum. extruded subgirt-angle
- ⑤ SG - Alum. extruded sub-girt 24"
- ⑥ GSK100 - EPDM spacer gasket
- ⑦ 1/4"-14 x 1" HWH S.S Bi-Flex or similar (Not by NBK)
- ⑧ Insulation per design
- ⑨ 5/8" GYP. Board sheathing with air & vapor barrier membrane (Not by NBK)
- ⑩ Vertical steel stud framing, min. 16 ga@ 16" centers (Not by NBK)
- ⑪ 1/4"-14 x 2" HWH S.S. Bi-Flex or approved equal (Not by NBK)
- ⑫ NBK PVC spacer-PT-01 - (Optional)

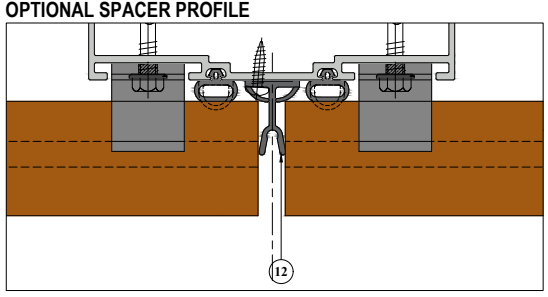

SYSTEM: TERRART 40	DETAIL: STANDARD STUDWALL DETAIL	DETAIL NUMBER: NBK-HS-40-01
TILE DIRECTION: HORIZONTAL	DRAWING REFERENCE: HORIZONTAL SECTION	SCALE: 1:2

NBK | ARCHITECTURAL TERRACOTTA
 A Hunter Douglas Company

NBK North America
 10 Federal Street, Second Floor
 Salem, MA 01970
 Telephone: +1 (781) 639 2662
 www.nbkterracotta.com

COPYRIGHT: © 2022 All rights reserved