


- ① 28mm thick NBK terracotta tile
- ② CLP30 - NBK extruded clip
- ③ VTS30/VTS31 Alum. extruded carrier track
- ④ SGA - Alum. extruded subgirt-angle
- ⑤ SG - Alum. extruded sub-girt 24"
- ⑥ GSK100 - EPDM spacer gasket
- ⑦ 1/4"-14 x 1" HWH S.S Bi-Flex or similar (Not by NBK)
- ⑧ Insulation per design
- ⑨ 5/8" GYP. Board sheathing with air & vapor barrier membrane (Not by NBK)
- ⑩ Vertical steel stud framing, min. 16 ga@ 16" centers (Not by NBK)
- ⑪ 1/4"-14 x 2" HWH S.S. Bi Flex or approved equal (Not by NBK)
- ⑫ NBK PVC spacer-PT-01 - (Optional)

**OPTIONAL SPACER PROFILE**

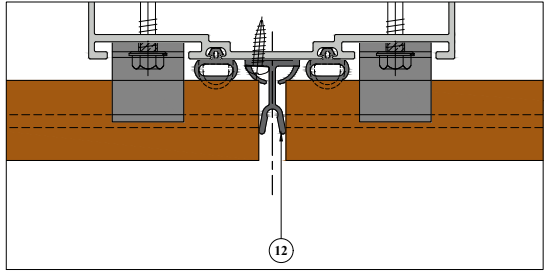

|                                      |   |                                       |
|--------------------------------------|---|---------------------------------------|
| SYSTEM:<br><b>TERRART 28</b>         | DETAIL:<br><b>STANDARD STUDWALL DETAIL</b>      | DETAIL NUMBER:<br><b>NBK-HS-28-01</b> |
| TILE DIRECTION:<br><b>HORIZONTAL</b> | DRAWING REFERENCE:<br><b>HORIZONTAL SECTION</b> | SCALE:<br><b>1:2</b>                  |

**NBK** ARCHITECTURAL TERRACOTTA  
 A Hunter Douglas Company

**NBK North America**  
 10 Federal Street, Second Floor  
 Salem, MA 01970  
 Telephone: +1 (781) 639 2662  
 www.nbkterracotta.com